

CARILLO™ WHIRLPOOL AND SOAKING TUB

025-0142R Cabrillo™ Whirlpool

- Alcove installation
- Aproned with removable access panel
- Eight fully adjustable Clean Jets™
- Spacious interior, generous leg room
- Comfortable, wide lumbar area
- Integral arm rests
- Integral tile flange
- Right hand outlet
- Heater blank (heater purchased separately)
- Made in USA
- Limited Lifetime Warranty
- Pre-leveled tub bottom
- Safety suction system stops water flow if obstructed
- Push button on/off switch
- Durable acrylic construction

035-0142R Cabrillo™ Air Bath

- Bath with gentle air bubble massage system
- Electronic control pad
- Right hand outlet

045-0142R Cabrillo™ Whirlpool & Air Combination

- Same as 025-0142R plus Air Bath system and electronic control pad

015-0142R Cabrillo™ Soaking Tub

- Right hand outlet

025-014RL Cabrillo™ Whirlpool

- Same as 025-0142R except left hand outlet

035-0142L Cabrillo™ Air Bath

- Same as 035-0142R except left hand outlet

045-0142L Cabrillo™ Whirlpool & Air Bath Combination

- Same as 045-0142R except left hand outlet

015-0142L Cabrillo™ Soaking Tub

- Left hand outlet

Nominal Dimensions:

60" x 32" x 20-1/2"
(1524 x 813 x 521mm)

Compliance Certifications - Meets or Exceeds the Following Specifications:

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7/CSA B45.10
- IAPMO Z124.1.2



To Be Specified - Required:

- Color:
- Bath Filler: (specify finish)
- Bath Drain: (specify finish)
Recommended: American Standard 1640.305.XXX (specify finish) Deep Soak™ drain

Factory Installed - Options:

- All models:
- Chromotherapy LED lights (3) with control pad - add "**K2**" suffix to model number
- Whirlpool and Air/Whirlpool combination models:
- Heater - add "**H**" suffix to model number
 - Heater and chromotherapy kit - add "**HK2**" suffix to model number (example: 025-0142RHK2)

Optional Accessories:

- 494-8505 - Remote control for chromotherapy
- 494-1000 - In-line heater (field installed)


For color/finish availability and other faucet choices, please see www.eljer.com

* **NOTE:** Whirlpool heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

SEE REVERSE SIDE FOR ROUGHING-IN DIMENSIONS AND PRODUCT SPECIFICATIONS

MODEL 025-0142R/L

Right hand drain shown

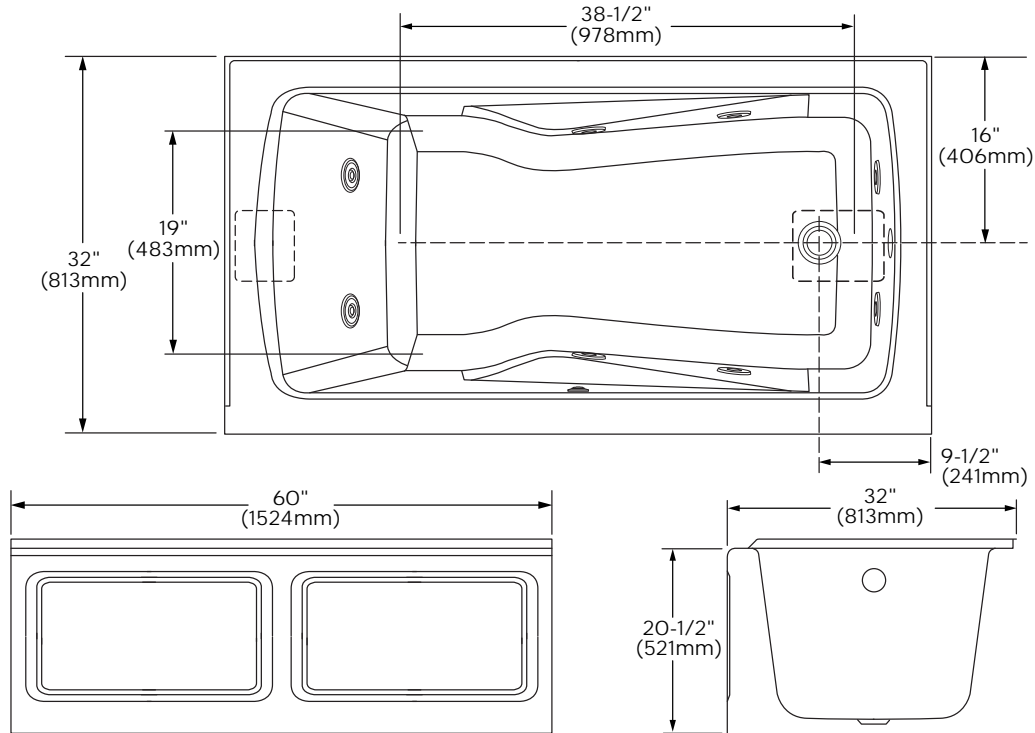

GENERAL SPECIFICATIONS FOR CABRILLO™ WHIRLPOOL	
INSTALLED SIZE	60 x 32 x 20-1/2 In. (1524 x 813 x 520mm)
WEIGHT	124 Lbs. (56 Kg.)
WEIGHT w/WATER	699 Lbs. (318 Kg.)
GAL. TO OVERFLOW	69 Gal. (261 L)
BATHING WELL AT SUMP	18" X 36" (457 x 914mm)
WATER DEPTH TO OVERFLOW	16 In. (406mm)
FLOOR LOADING (PROJECTED AREA)	52 Lbs./Sq.Ft. (256 Kgs./Sq.m)
PTS.	15.28
CUBE (FT³)	25.91

NOTES:

SUMP OF BATH IS SUPPORTED BY INTEGRAL FEET. NO ADDITIONAL SUPPORT REQUIRED. ENCLOSING MATERIAL BY OTHERS.

REFER TO INSTALLATION INSTRUCTIONS SUPPLIED FOR ADDITIONAL INFORMATION.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IF INSTALLING A DECK-MOUNTED FITTING, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH CIRCULATING SYSTEM PIPING, DRAIN OVERFLOW, AND APRON INSTALLATION. MOUNTING HOLES DRILLED BY INSTALLER.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.