

Welded Wire Kennel 4'w x 4'd x 6'h

Assembly Instructions

Parts List:

- 7 Kennel Panels
- 1 Kennel Gate Panel (Pre-assembled)
- 1 Gate Latch Assembly (Latch, Back plate, U-bolts w/Wing Nuts)
- 16 Panel Clamps, 2pc. w/Bolts & Wing Nuts
- 12 Roof Cover Bungee Cords
- 1 Roof Cover
- 2 Roof Truss Frames
- 1 Ridge Pole
- 2 Ridge Pole Clamps w/Bolts & Wing Nuts



Complete Kennel

1. Unpack parts and be sure you have all hardware prior to assembly. (See number at the bottom of the page if you have missing or damaged parts)

2. Layout panels in configuration shown (**Fig. 1**). Determine location of your gate when laying out your panels. **NOTE: 1" leg extensions are facing inward when you lay them out.**

3. Stand up two panels and create a 90° corner of the kennel. Place clamps approximately 6" from both the top and bottom adjacent panels (**Fig. 2**). Tighten wing nuts hand tight (**Fig. 3**). **IMPORTANT NOTE: The frame of the front and back panels of the kennel need to be in front of the side panel frame when attaching the clamps (Fig. 4).** Complete the assembly of panels & clamps until kennel configuration is complete. **NOTE: Wing nuts should face outside of kennel for pet safety.**

4. Insert ends of roof truss frames into the corners of the kennel (**Fig. 5**). Place ridge pole at peak of truss frames and fasten using ridge pole clamps. Place cover over frame and evenly attach using bungee cords connectors provided. **NOTE: Wing nuts on ridge pole clamps should face down so they do not damage the cover material.**

5. Fasten latch assembly to gate panel. Place latch slightly above the middle of gate. Fasten with U-bolt and nuts as shown (**Fig. 6**).

Fig. 1

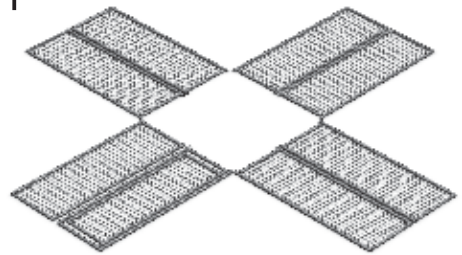


Fig. 2

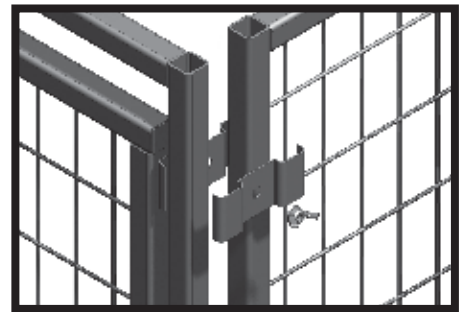


Fig. 3

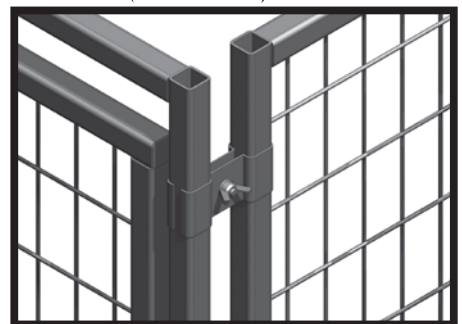


Fig. 4

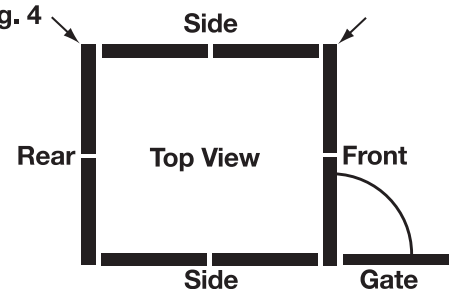


Fig. 6

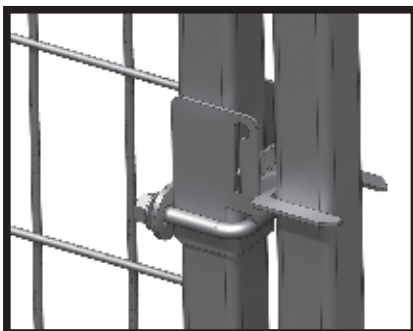


Fig. 5

