
HOMEbasics®


Child Safe and Environmentally Responsible Products for Your home

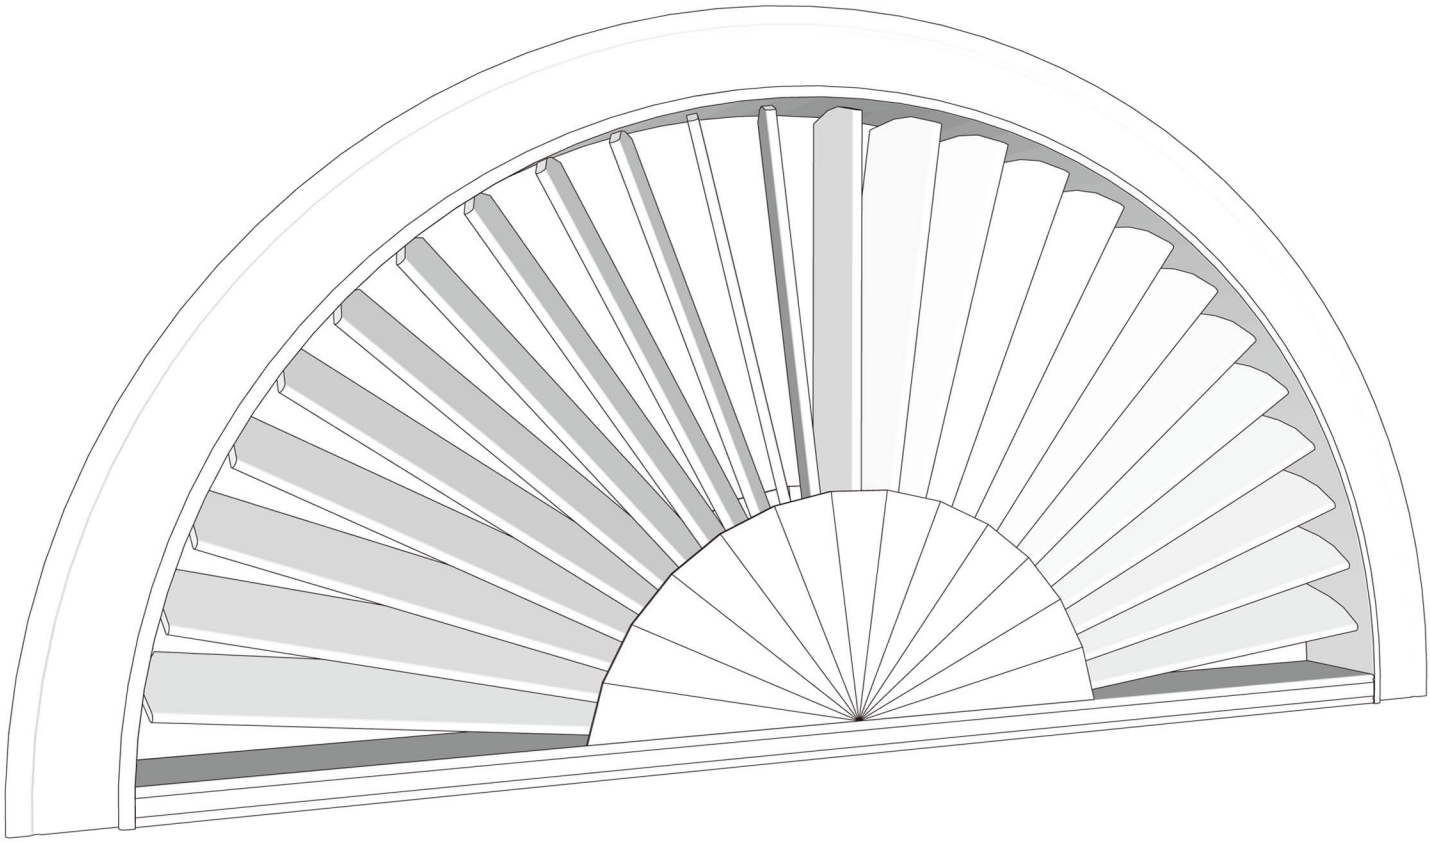

SUNBURST ARCH TOP


Español p. 5

PACKAGE CONTENTS

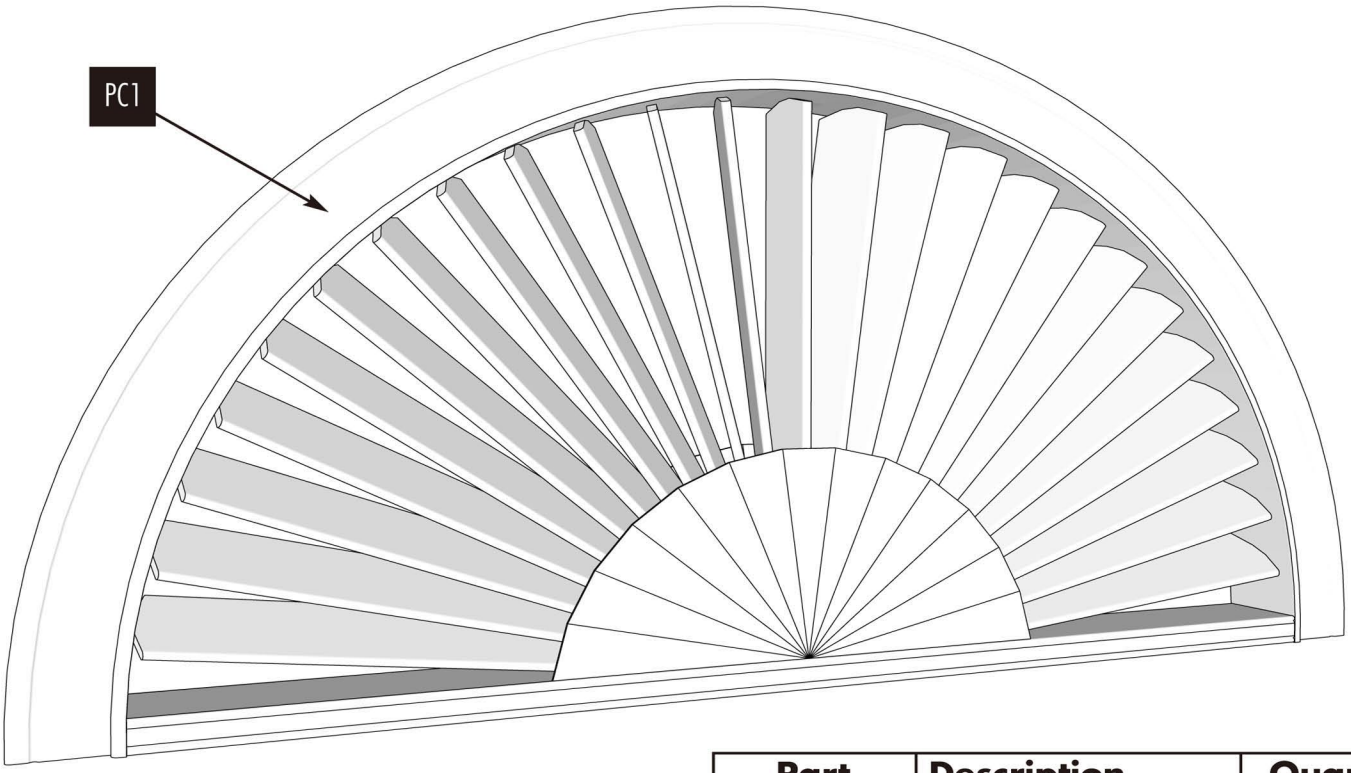

Part	Description	Quantity
PC1	Sunburst Arch Top	1

HARDWARE CONTENTS

Part		Description	Quantity
HC1		3 in. Screw	3

PREPARATION

Approximate Installation Time: 45 minutes

Tools Required for Installation: Pencil, Safety Goggles, Phillips Screwdriver, Drill.

Before beginning installation of product, make sure all parts are present. Compare parts with package contents list and diagram above. If any part is missing or damaged, do not attempt to install the product. Contact customer service for replacement parts.

INSTALLATION INSTRUCTIONS

Step 1:

Before installing your Sunburst Arch Top (PC1), place in center of window opening and make sure that the arch fits as desired.

Step 2: (Fig. 1)

While Sunburst Arch Top (PC1) is still in window, check to make sure it is level, then locate the three predrilled holes in the outer frame of the arch. Using a pencil, mark the screw hole positions on the inside of the window frame.

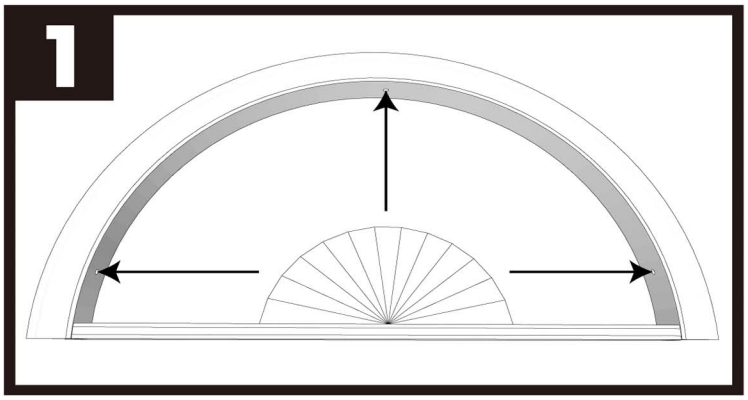


Fig. 1 - Location of Screw Holes

Step 3:

Remove Sunburst Arch Top (PC1) from window, and using a drill with a 1/16in. bit, predrill the window frame at your marked locations.

Step 4:

Place Sunburst Arch Top (PC1) back into window and align screw holes with the pre-drilled holes from step 3 in the window frame. Using the supplied screws (HC1), fasten the Sunburst Arch Top (PC1) to the inside of the window frame.

Notes:

Do not over tighten screws. Over tightening the screws may cause the arch frame to warp and possibly bind or damage the arch and prevent the arch from operating properly.


To center the arch in the window opening, you may tighten or loosen the screws to adjust the position of the arch in the window opening.

CARE AND MAINTENANCE

Wipe with a damp cloth or very mild spray cleaner. Dry immediately with dry cloth. Do not use heavy cleaning solvents.


HOMEbasics®

Productos para su hogar seguros para los niños y responsables con el medio ambiente

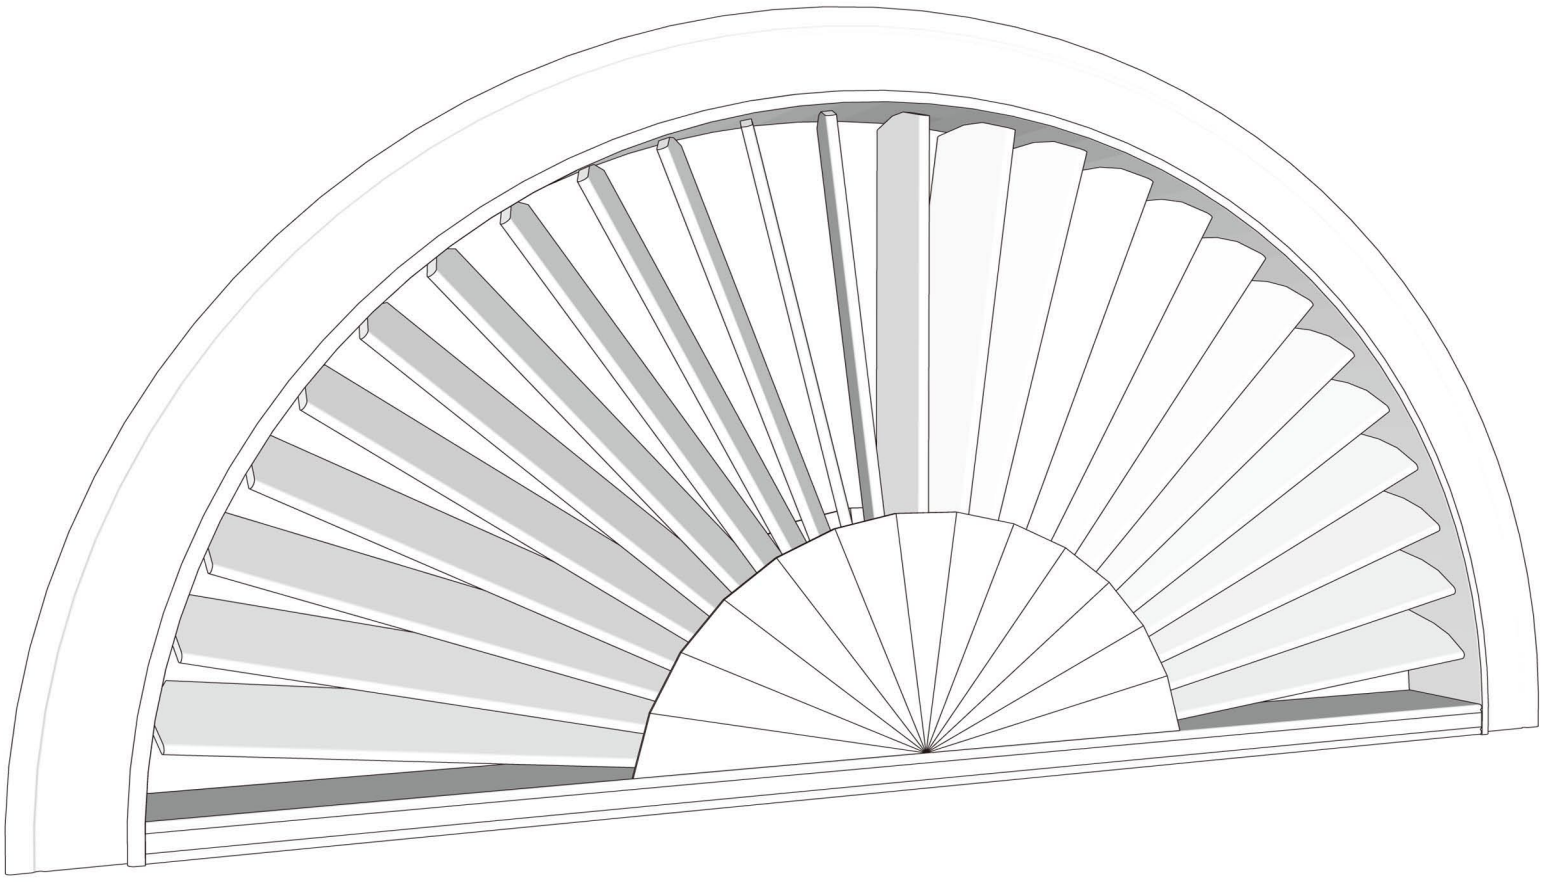


PARTE SUPERIOR ARQUEADA TIPO AUREOLA SOLAR

CONTENIDO DEL PAQUETE

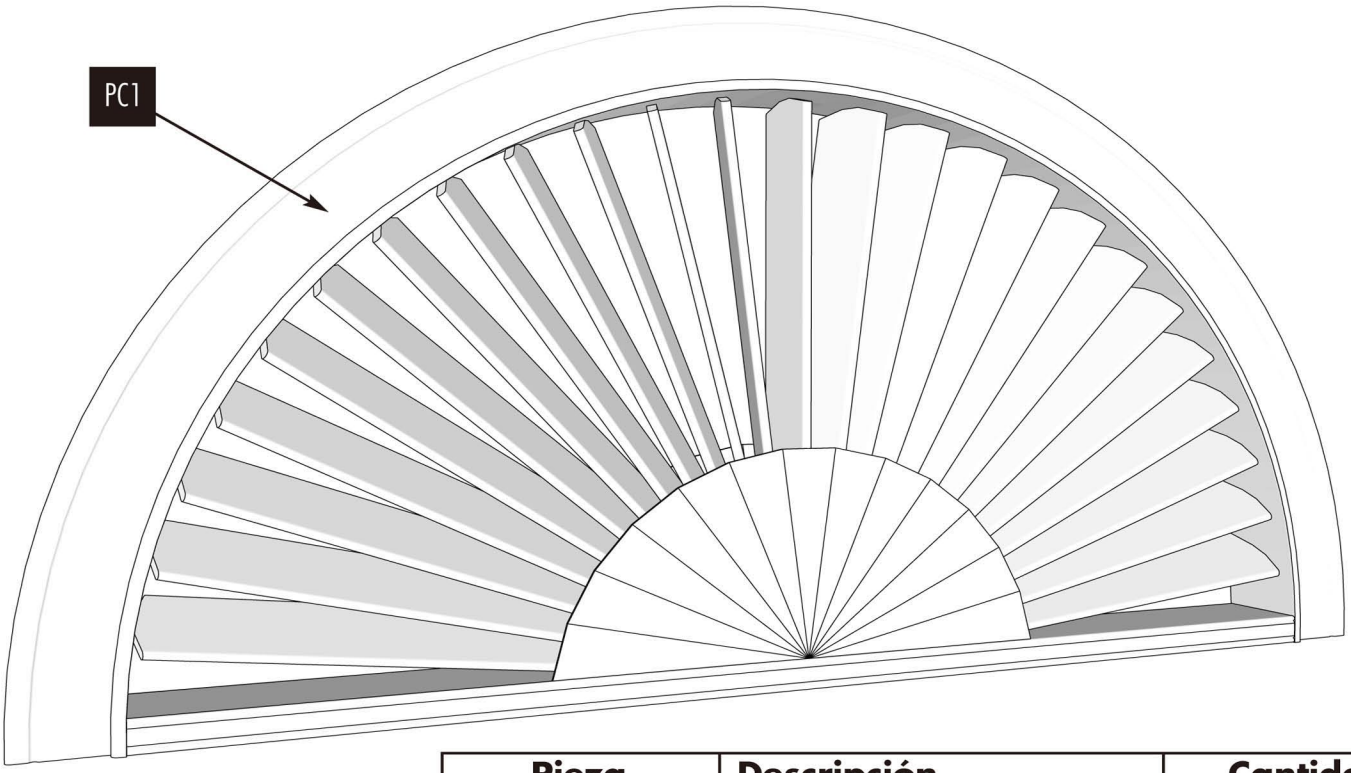

Pieza	Descripción	Cantidad
PC1	Parte superior arqueada tipo aureola solar	1

ADITAMENTOS

Pieza		Descripción	Cantidad
HC1		Tornillo de 3"	3

PREPARACIÓN

Tiempo de instalación aproximado: 45 minutos

Herramientas necesarias para la instalación: lápiz, gafas de seguridad, destornillador Phillips, taladro.

Antes de comenzar a instalar el producto, asegúrese de tener todas las piezas. Compare las piezas con la lista del contenido del paquete y el diagrama anterior. No intente instalar el producto si falta alguna pieza o si éstas están dañadas. Póngase en contacto con el Departamento de Servicio al Cliente para obtener piezas de repuesto.

INSTRUCCIONES DE INSTALACIÓN

Paso 1:

Antes de instalar la parte superior arqueada tipo aureola solar (PC1), colóquela en el centro de la abertura de la ventana para asegurarse de que cabe.

Paso 2: (Fig. 1)

Mantenga la parte superior arqueada tipo aureola solar (PC1) en la ventana, revise si está nivelada y ubique los tres orificios taladrados en el marco exterior del arco. Marque la ubicación de los orificios para tornillos con un lápiz en la parte interior del marco de la ventana.

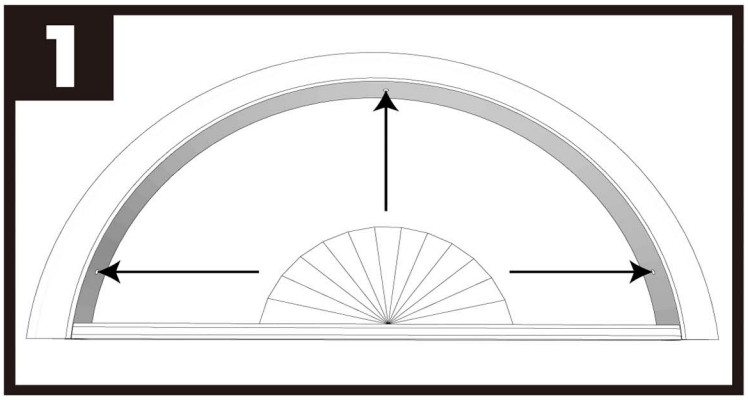


Fig. 1: Ubicación de los agujeros para tornillos

Paso 3:

Retire la parte superior arqueada tipo aureola solar (PC1) de la ventana, y con la ayuda de un taladro y de una broca de 1/16", haga un agujero guía en las posiciones marcadas en el marco de la ventana.

Paso 4:

Vuelva a colocar la parte superior arqueada tipo aureola solar (PC1) en la ventana y alinee los orificios para tornillos con los orificios taladrados en el paso 3 en el marco de la ventana. Utilice los tornillos provistos (HC1) y sujete la parte superior arqueada tipo aureola solar (PC1) a la parte interior del marco de la ventana.

Notas:

No ajuste demasiado los tornillos. Esto puede causar que el marco del arco se tuerza y presione o dañe el arco, lo cual evitaría que este último funcione adecuadamente.

Para centrar el arco en la abertura de la ventana, puede ajustar o desajustar los tornillos para regular la posición del arco en la abertura de la ventana.

CUIDADO Y MANTENIMIENTO

Limpie con un paño húmedo o un limpiador en aerosol suave. Seque inmediatamente con un paño seco. No utilice solventes de limpieza fuertes.